

1 UPS 25-40 130



: 96281376

, PES/PP.

1-

: 2 .. 110 °C
: 60 °C
983.2 / 3

TF : 110
: VDE

EN-JL1030
ASTM 30 B
, PES/PP

.T : - 80 0C: 40 °C

10
G 1 1/2
PN 10
130

C : 1.5

1: 25

2: 35

: 45

: 50 Hz

: 1 x 230 V

1: 0.12 A

2: 0.16 A

3: 0.2 A

- : 1.5

(IEC 34-5): IP44

(IEC 85): F

:

:

:


:

2.4

2.6

0.004 ³

96281376 UPS 25-40 130 50

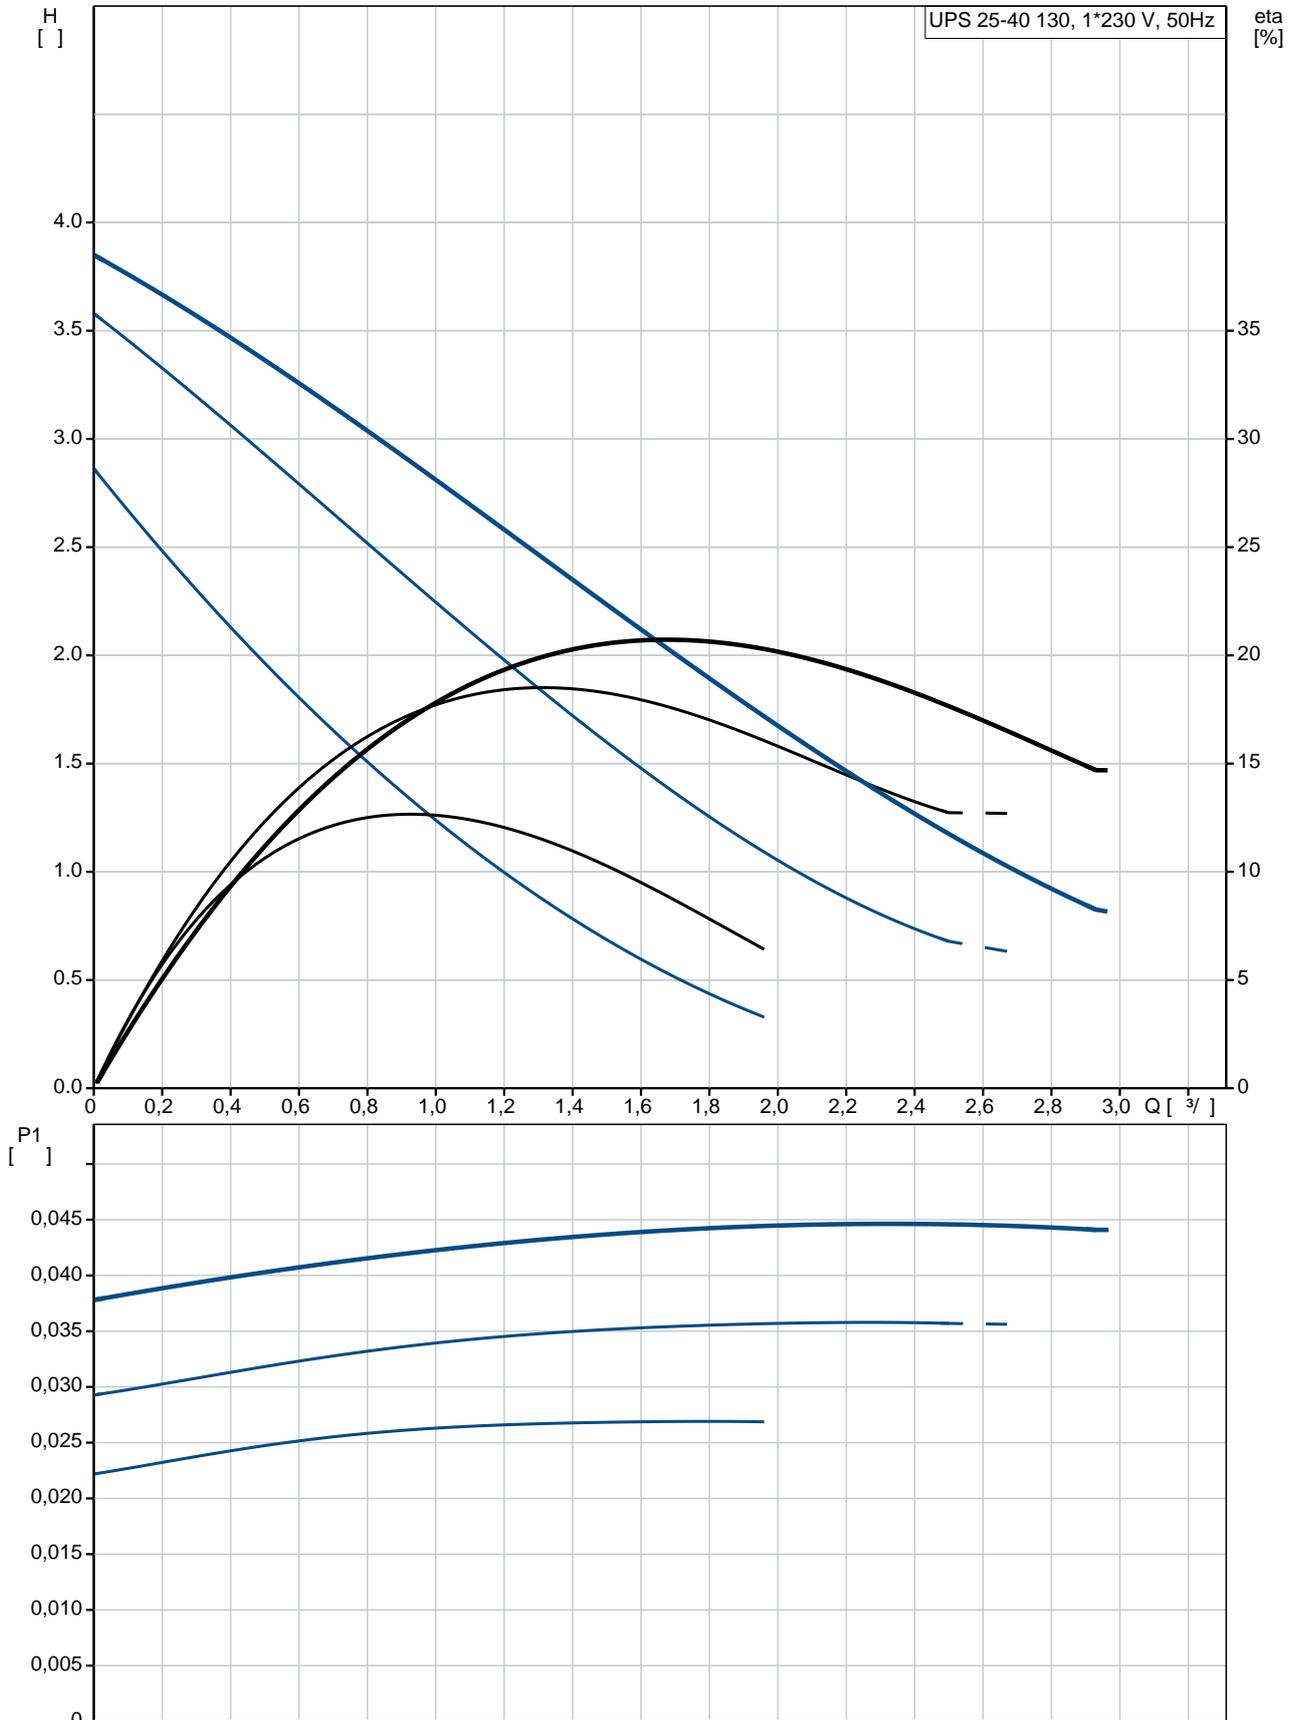

| | |
|---------------|------------------------------------|
| UPS 25-40 130 | 96281376 |
| EAN | 5700830383223 |
| TF | 3 40 110 VDE |
| | EN-JL1030 ASTM 30 B , PES/PP |
| .T | 40 °C |
| 80 OC: | 10 G 1 1/2 PN 10 130 |
| | 2 .. 110 °C 60 °C |
| | 983.2 / ³ |
| C | 1.5 |
| 1: | 25 |
| 2: | 35 |
| | 45 |
| | 50 Hz |
| | 1 x 230 V |
| 1: | 0.12 A |
| 2: | 0.16 A |
| 3: | 0.2 A |
| | 1.5 |
| (IEC 34-5): | IP44 |
| (IEC 85): | F |
| | 9H |
| | 2.4 |
| | 2.6 |
| | 0.004 ³ |

